


PLASKOLITE

PETG

Extruded Polyethylene Terephthalate
Glycol (PETG) Solid Sheets

SOLID SHEETS 

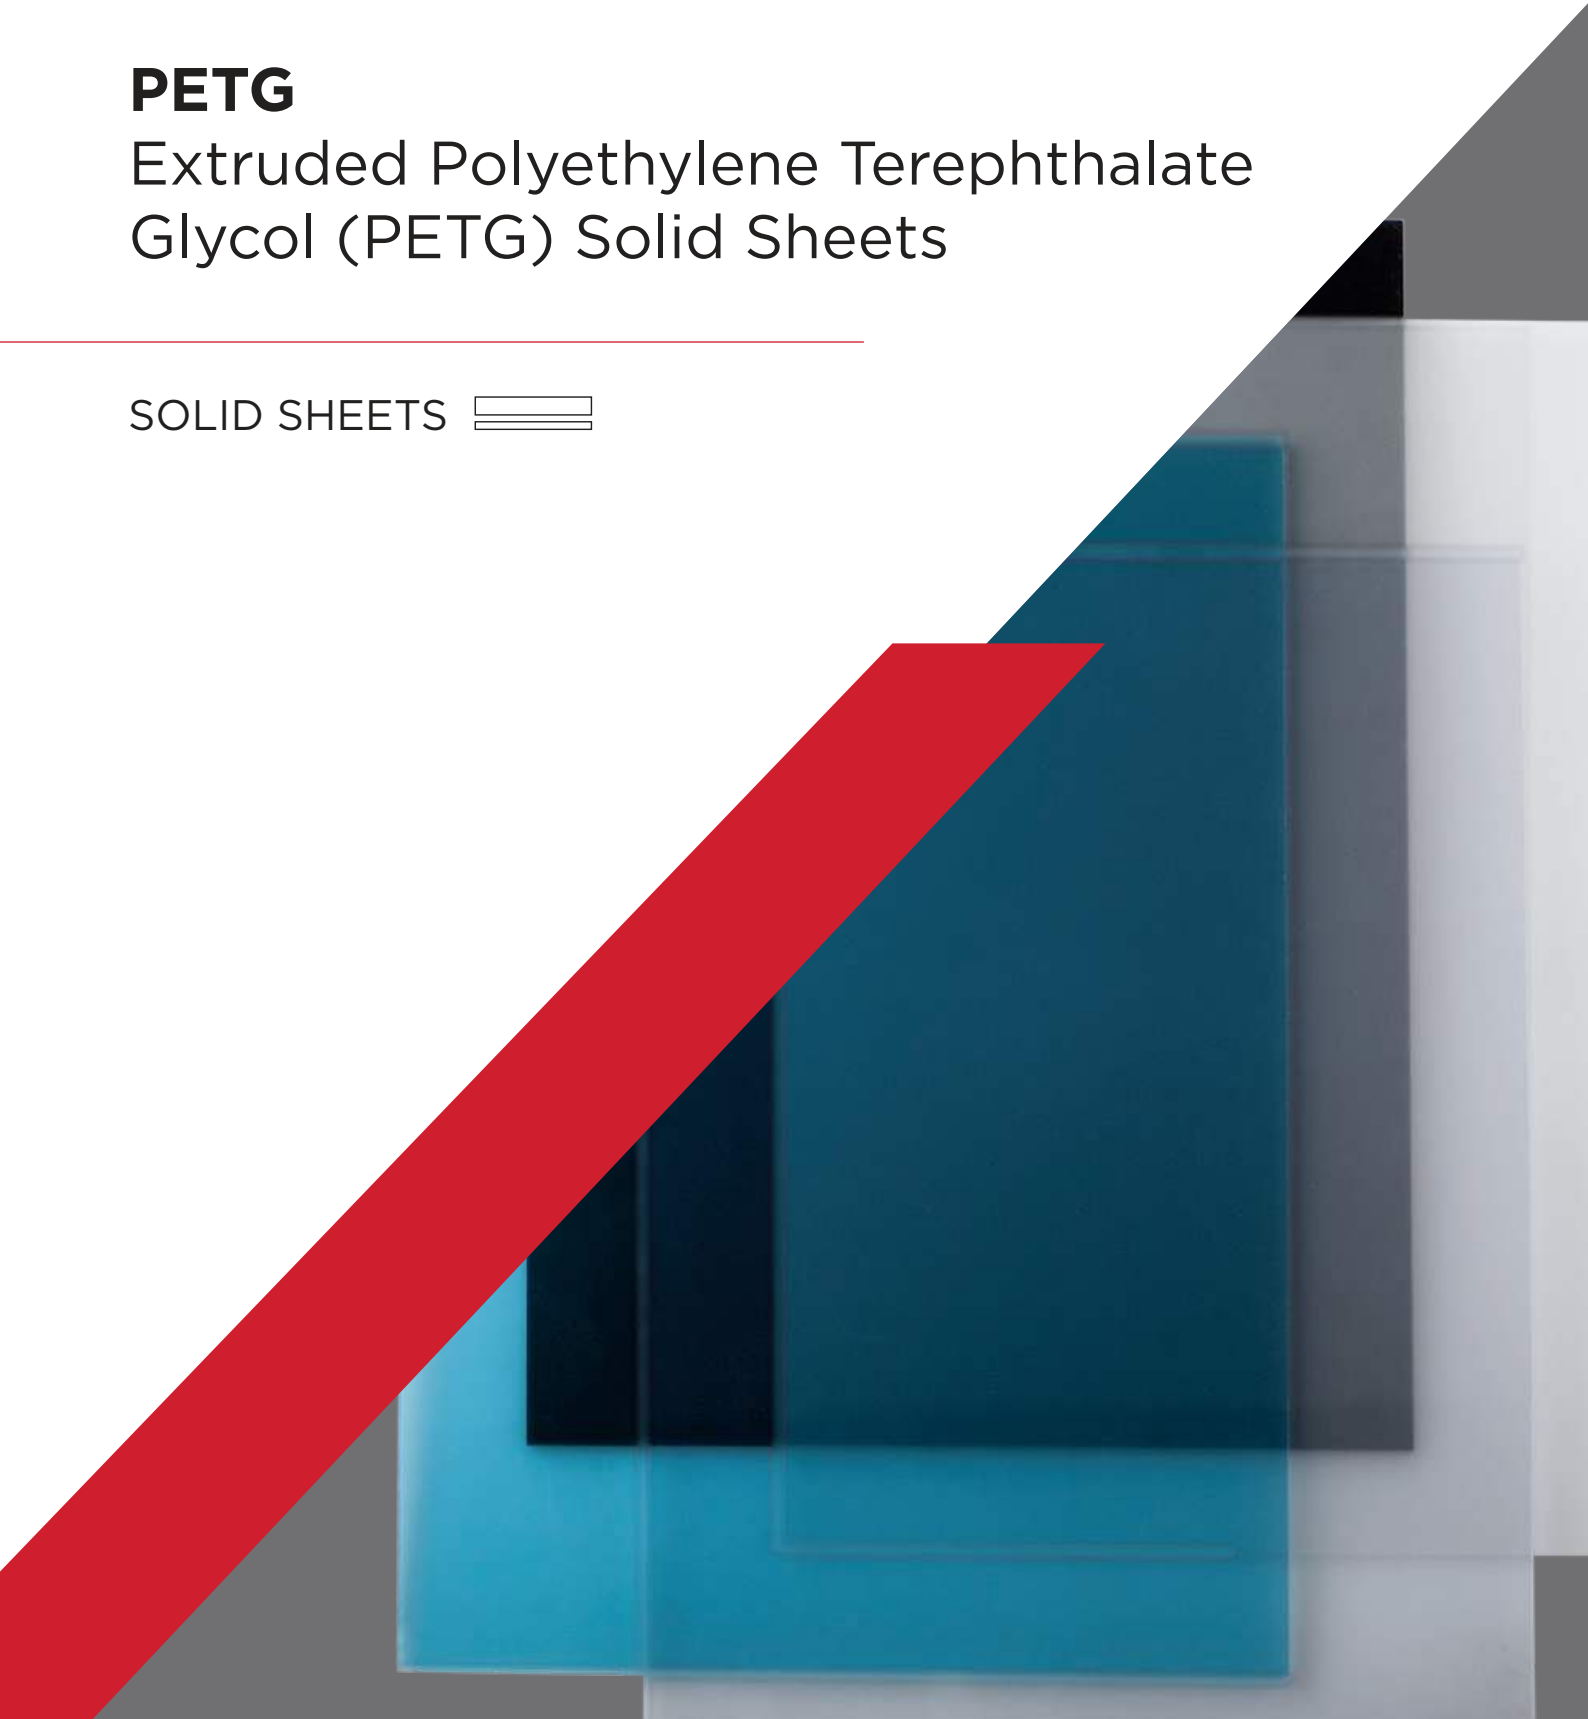

PETG Clear Plastic Sheets EXTRUDED POLYETHYLENE TEREPHTHALATE GLYCOL (PETG) SOLID SHEETS

PLASKOLITE PETG sheets are a thermoplastic polyester that provides excellent formability for manufacturing and combines exceptional clarity, strength and excellent chemical resistance. PLASKOLITE PETG sheets are produced with a unique balance between physical properties and processing capabilities that allow for fine thermo-forming and implementation of precise details required for special and complex projects.

The numerous advantages of PETG sheets over other transparent thermoplastic sheets are their ease to handle, their capability to produce complex shapes, precise details, deep draws and compound curves without worrying about durability, and their ease to produce custom fabrication and print allowing a greater freedom of design. Moreover, their low temperature thermoforming without pre-drying allows for easy and cost-effective thermoforming.

Applications



POP displays



Vending machines



Machinery guards



Supermarket trolley shelters



Signing



Glazing



Thermoforming

Main advantages

- » High clarity and light transmission
- » Excellent impact strength
- » Ductile - excellent toughness
- » Excellent flexibility
- » Easy to clean - Chemically resistant to most common cleaners
- » Lightweight. About half weight of glass
- » Easily to handle, machine and fabricate allowing design freedom
- » Easy to print on
- » Cold curving capability
- » Easy to thermoform
- » Odor free
- » Halogen free
- » Fully recyclable
- » UV protection for outdoor use available upon request

Dimensions		
Thickness	0.5 - 10.0	mm
Width	1000, 1250, 2050	mm
Length	600 - 6000	mm

Sheets are also available cut to size, according to customer requirements

Colors:

Clear, pigments may be added to obtain a wide range of tints per customer requirements.

Grades:

PETG - Non-UV protected, for Internal use only
 PETG UV - UV coextruded, 2 sides UV (specific thicknesses)

TYPICAL PROPERTIES

PROPERTIES	METHOD	UNITS	VALUE
GENERAL			
Density	ISO 1183	gr/cm ³	1.27
Water Absorption	ISO 62 (1)	%	0.2
Flammability: < 3 mm	UL94		94HB
> 3 mm			94V-2
MECHANICAL			
Tensile Stress at Yield	ISO 527-2	MPa	53
Tensile Stress at Break	ISO 527-2	MPa	26
Elongation at Break	ISO 527-2	%	> 60
Tensile Modulus	ISO 527-2	MPa	2200
Flexural Strength	ISO 178	MPa	70
Flexural Modulus	ISO 178	MPa	2100
Impact Resistance (Charpy unnotched)	ISO 179/1fu	kJ/m ²	NB
Impact Resistance (Izod notched)	ISO 180/1A	kJ/m ²	7
OPTICAL			
Refractive Index	ASTM D542		1.57
Light Transmission (3 mm transparent sheet)	ASTM D1003	%	90
Haze (3mm transparent sheet)	ASTM D1003	%	< 1
THERMAL			
Vicat Softening Temp. 1 kg Load	ISO 306	°C	83
5 kg Load			78
Heat Deflection Temp. 0.45 MPa	ISO 75	°C	72
1.80 MPa			68
Coeff. of Linear Thermal Expansion (-30°C - +23 °C)	ASTM D696	mm/mm·°C	7X10 ⁻⁵ /°C
Service Temperature Range		°C	-40 - +60
ELECTRICAL			
Dielectric Constant 1kHz	ASTM D150		2.6
1MHz		2.4	
Dissipation Factor tan 1 kHz	ASTM D150		0.005
1 MHz		0.023	
Dielectric Strength (Short Time, 500 V/sec) rate-of-rise	ASTM D149	kV/mm	16.1
Surface Resistivity	ASTM D257	Ohms/square	>10 ¹⁶
Volume Resistivity	ASTM D257	Ohm·cm	>10 ¹⁵

PLASKOLITE

A GLOBAL LEADER IN THE PRODUCTION OF THERMOPLASTIC SHEET

FOUNDED IN 1950

Our Mission: to deliver superior thermoplastic sheet, coatings and polymers to the world, through long-lasting customer relationships and hands-on customer service.

MANUFACTURING LOCATIONS



From our founding, PLASKOLITE strives to treat our employees, our customers, our community and the world, with kindness, dignity and respect. This drives our continuing effort to create sustainable products, in a sustainable manner, for future generations. This on-going commitment is expressed in the

PLASKOLITE Sustainable Ecosystem:

QUICK FACTS

STATUS: Privately held


GLOBAL HEADQUARTERS: Columbus, OH

EMPLOYEES: 1900 Worldwide

MARKETS SERVED: Signage, Lighting, Retail Display, Construction, Transportation, Security, Bath & Spa, Industrial, Architecture, Green Houses

OUR PILLARS OF SUSTAINABILITY

EACH CONTRIBUTES TO MAKING THE WORLD A BETTER PLACE

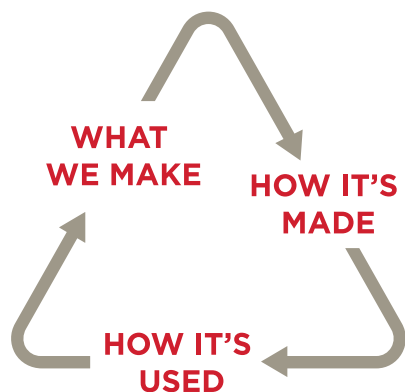

WHAT WE MAKE

Versatile, high-quality, durable thermoplastic materials...not single-use plastics

HOW IT'S MADE

How we make our products reflects our overall philosophy of continuous environmental improvement

HOW IT'S USED

Our thermoplastics play an important role in advancing human well-being, energy conservation and quality of life

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2023 PLASKOLITE, LLC 082023
PETG is a registered trademark of PLASKOLITE LLC

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com

BRO086_PETG_EU