


Selectogal (RFX)

In nature the sun's light and warmth are an integral part of life, making it more pleasant when we bask in its bright and warming rays. PLASKOLITE's Selectogal panels allow us to experience the wonders of nature and shape its joie de vivre, when you use Selectogal, you are surrounded by aesthetic beauty. Selectogal's special construction markedly reduces the level of heat during summer while allowing maximum penetration of solar energy during winter. Available in 16 mm thick sheets, PLASKOLITE's Selectogal is easy to install, long lasting, offers an aesthetic roofing solution and can be used for interior design and projects as well.

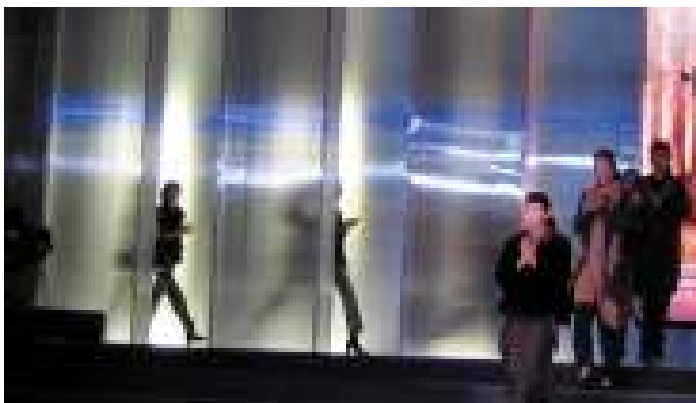

Technical specifications

Thickness	16 mm (5/8")
Weight	3 kg/m ² (0.62 lb/ft ²)
Standard width	1.05 m (41")
Min radius for cold bending arches	2.8 m (9' 2")
U-factor ASTM-C-177	2.3 w/m ² • °C (0.41 Btu/hr • ft ² • °F)
Light transmission ASTM D-1003 (%)	clear 75
	bicolor* 32

* Other colors by special request



These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com