
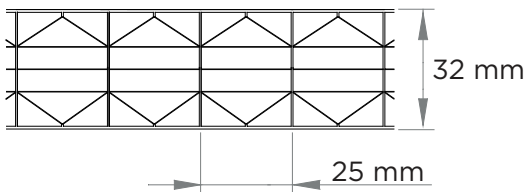


Polygal Multiwall Polycarbonate Sheets

- Excellent Insulation
- Controlled Daylight Transmission
- Virtually Unbreakable
- Flame Retardant
- Flexible and Easy to Install
- Lightweight
- UV Blocking Layer
- Energy Saving
- Environmentally Friendly

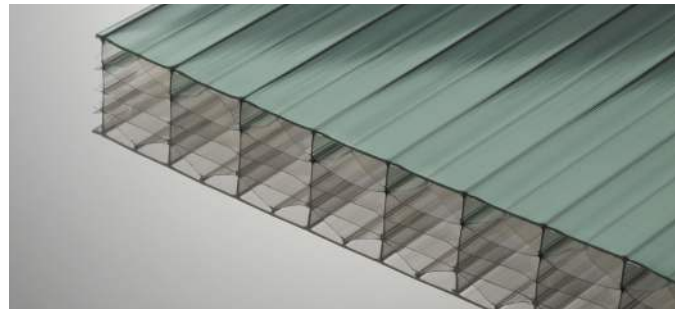


Technical Specifications

Thickness	Weight	Standard Width	Standard Length	Min. radius for cold bending	U-Factor	Light Transmission by ASTM D 1003
32 mm (1-1/4")	3800 g/m ² 0.78 lbs/ft ²	1250 mm 47.25"	12000 mm 36'	4400 mm 173"	1.3 W/m ² • °C 0.25 BTU/h/ft ² /F	Clear: 50% Spring 44% Silhouette Pearl 45%

A 32 mm Thermogal Polycarbonate Multiwall Sheet, specially manufactured with a clear tint appearance. This product provides excellent thermal insulation and is highly flexible yet virtually unbreakable. With a unique inner X-brace multi-layer structure, this product provides extra strength, rigidity

and outstanding insulation. Ideal for low pitched roofs, cladding and glazing in closed structures with large-span openings and high insulation requirements.

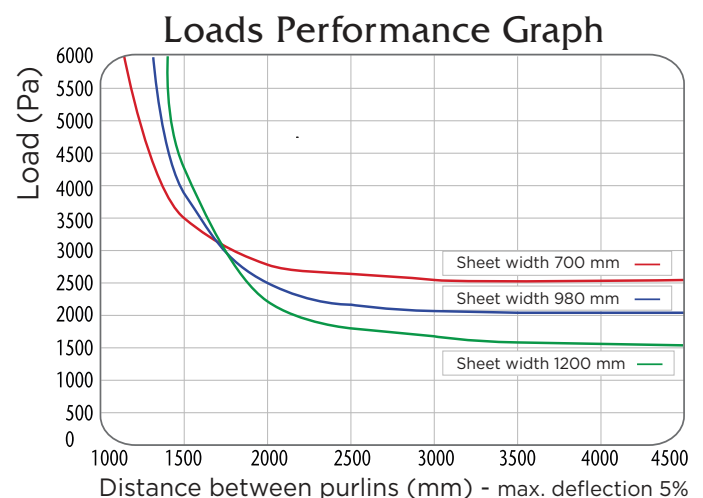

These suggestions and data are based on information we believe to be reliable. They are offered in good faith, but without guarantee, as conditions and methods of use are beyond our control. We recommend that the prospective user determines the suitability of our materials and suggestions before adopting them on a commercial scale.

© 2022 PLASKOLITE, LLC 30012023
OPTIX® is a registered trademark of PLASKOLITE LLC

PLASKOLITE

400 W Nationwide Blvd, Suite 400
Columbus, OH 43215
800.848.9124 • Fax: 877.538.0754
plaskolite@plaskolite.com
www.plaskolite.com